
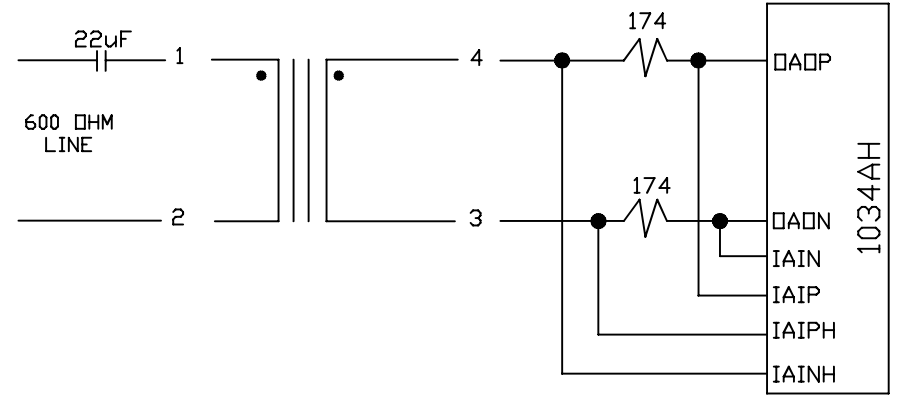


FOOT PRINT

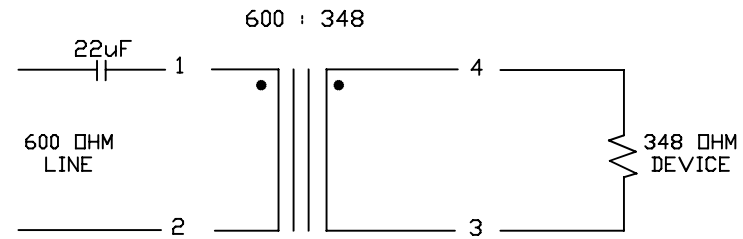

ELECTRICAL CHARACTERISTICS :

(FOR 1034AH V.90, MEET IEC 950)

1. D.C.R. : PIN 1-2 = 135 OHM MAX.
PIN 3-4 = 160 OHM MAX.
2. INDUCTANCE (@1KHZ, 1V_{rms} LP) : PIN 1-2 = 2.5Hy MIN.
3. INSERTION LOSS (@1KHZ, 0dBm) : PIN 1-2 = 3.0dB MAX.
4. FREQ. RESP. (REF. 1KHZ) : @200HZ-4KHZ = ± 0.15dB
5. RETURN LOSS (REF. 600 OHM) : @200HZ = 30dB MIN.
@1KHZ = 30dB MIN.
@4KHZ = 20dB MIN.
6. TURNS RATIO : PIN 1-2 : PIN 4-3 = 1 ± 1%
7. LONGITUDINAL BAL. = 60dB MIN. (@200-4KHZ)
8. T.H.D. (@600HZ, -10dBm) = -78dB MAX.
9. HI-POT (@1650VAC, 1mA, 2SEC.) PRI. - SEC.
10. LEAD-FREE.

						Atech [®]		TITLE 1034AH TRANSFORMER	
						Atech Technology Co. Ltd. TEL:022794-6667 FAX:022794-8004		DWG. NO. ATS-329AN	
						UNITS:		SAFETY	
						DATE		SHEET 1 OF 1	
						DRAW			
REVISIONS									
NO.	DESCRIPTION	DATE	BY	CHK	APPD				