


PIN 2,6,8,10 CUT OFF

Unit:mm

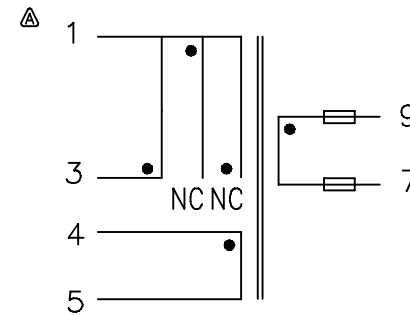

□ : TEFLON TUBE

ELECTRICAL CHARACTERISTICS:

- 1.DCR : PIN 1-3 = 3.2Ω MAX.  
PIN 4-5 = 500mΩ MAX.  
PIN 7-9 = 30mΩ MAX.
- 2.INDUCTANCE (@10KHz, 0.1Vrms):  
PIN 3-1 = 2667uH ±10%
- 3.LEAKAGE INDUCTANCE (@100KHz, 0.1Vrms):  
PIN 3-1 (PIN 4-5,7-9 SHORT) = 107uH MAX.
- 4.TURN RATIO : (@100KHz, 0.1Vrms):  
PIN 3-1 : 4-5 = 5.7 ±2%  
PIN 3-1 : 9-7 = 34.25 ±2%
- 5.HI-POT : (@3000VAC, 2mA, 2SEC) PIN 3.4 - PIN 9
- 6.RoHS COMPLIANT

								TITLE TRANSFORMER	
								DWG. NO. ATS-1375R	
RELEASE						UNITS:		SAFETY	
NO: DESCRIPTION						DATE		P/N:	
DATE						BY		DRAW	
DATE						CHK		SHEET 1 of 1	
DATE						APPD		DRAW	
REVISIONS									