


PIN 4,5,6,7,8,9,11 CUT OFF

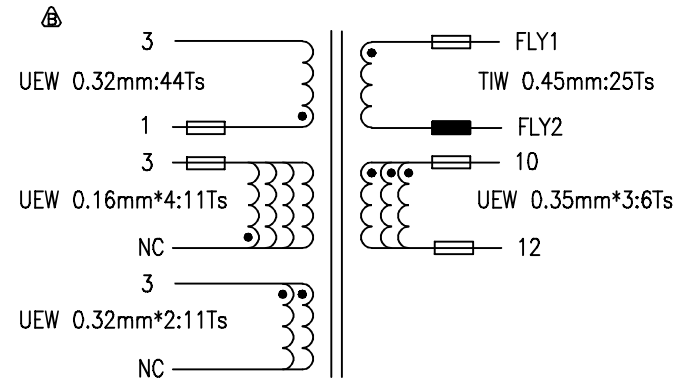

* RoHS COMPLIANCE

⚠ For Class B Insulation system

ELECTRICAL CHARACTERISTICS :

- DCR : 1-3 = 400mΩ MAX.
10-12 = 40mΩ MAX.
FLY1-FLY2 = 160mΩ MAX.
- INDUCTANCE (@10kHz, 1.0Vrms)
PIN 1-3 = 383uH ±5%
- LEAKAGE INDUCTANCE (@100kHz, 0.1Vrms, 12,10,FLY1,FLY2 SHORT)
PIN 1-3 = 11.5uH MAX.
- TURNS RATIO (@10kHz, 1Vrms)
PIN 1-3 : FLY1-FLY2 = 1.76 ±3%
PIN 1-3 : 10-12 = 7.33 ±3%
- HI-POT (@3KAC, 1mA, 1SEC) PIN 1,3,10,12 - FLY1,FLY2

								TITLE POWER TRANSFORMER	
								DWG. NO. ATS-1672R	
RELEASE						UNITES:		SAFETY	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		P/N:	
REVISIONS								SHEET 1 OF 1	
								DRAW	