


ELECTRICAL CHARACTERISTICS : (Meet IEC950/UL1950,36148 COMPATIBLE)

1. PIN 1-4 = PIN 2-5 = 0.18 OHM MAX.
PIN 10-7 = PIN 9-6 = 0.774 OHM MAX.
2. INDUCTANCE (@10 KHZ , 0.1 Vrms):
PIN 10-6 (7-9 SHORT) = 800 uH ±5%
3. LEAKAGE INDUCTANCE (@100 KHZ , 0.1 Vrms):
PIN 10-6 (7-9 , 1-4-2-5 SHORT) = 15 uH MAX.
4. INTERWINDING CAP. (@100 KHZ , 0.1 Vrms):
PRI-SEC = 65 PF MAX.
5. TURNS RATIO (@5 KHZ , 1 Vrms):
PIN 10-7-9-6 : PIN 1-4-2-5 = 3.33 ±1%
6. LONGITUDINAL BAL. (@100 KHZ , 0 dBm): 60 dB min.
7. HI-POT(@1500 VAC , 1 mA , 1 MIN.):PRI.-SEC.
8. LEAD-FREE.

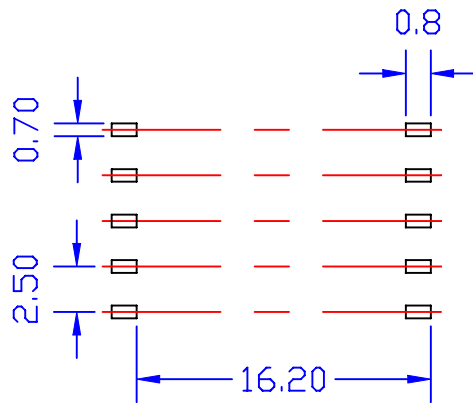

NONE TOLERANCE FOR REFERENCE

						Atech [®]		TITLE ADSL TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO. ATS-428AN	
						TEL:(02)2794-8867 FAX:(02)2794-8004			
RELEASE						UNITS:		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS								DRAW	