


TOLERANCES : XX.X ± 0.25  
X.XX ± 0.05

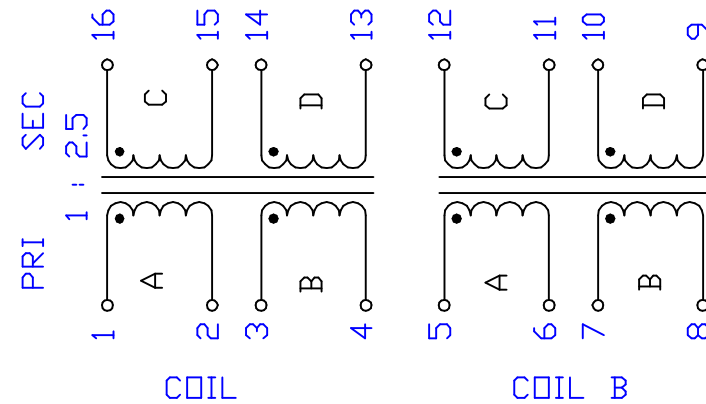

ELECTRICAL CHARACTERISTICS : <PE-65798 COMPATIBLE>

- D.C.R. : PRI. = 2.5 OHM ± 25%  
SEC. = 5.8 OHM ± 25%
- INDUCTANCE (@10KHZ, 100mVrms) :  
PIN 1-4 ( 2-3 SHORT ) = 22mH MIN.  
PIN 5-8 ( 6-7 SHORT ) = 22mH MIN.
- LEACKAGE INDUCTANCE (@100KHZ, 100mVrms) :  
PIN 13-16 ( 2-3, 1-4, 14-15 SHORT ) = 40uH MAX.  
PIN 9-12 ( 6-7, 5-8, 10-11 SHORT ) = 40uH MAX.
- INTERWINDING CAP. (@100KHZ, 100mVrms) : PRI-SEC = 100pF MAX.
- TURNS RATIO (@10KHZ, 100mVrms) : PRI : SEC = 1 : 2.5 ± 2%
- HI-POT (2KVAC, 1mA, 2SEC) : PRI. - SEC.

						<b>Atech®</b> Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE	ISDN-S TRANSFORMER
							DWG. NO.	ATPL-026
A	24.0MAX. TO 24.15 ; 18.0BTYP. TO 18.20	10/09 /2002	DOLLY	AL	SUEDY	UNITS:	SAFETY	
	RELEASE	11/11 /98	PAIR		SUEDY	M/M	SHEET 1 OF 1	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	DRAW	
REVISIONS						11/11/98	Pair	