
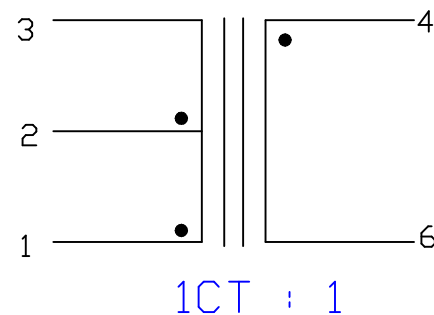
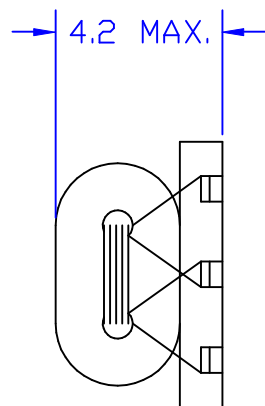


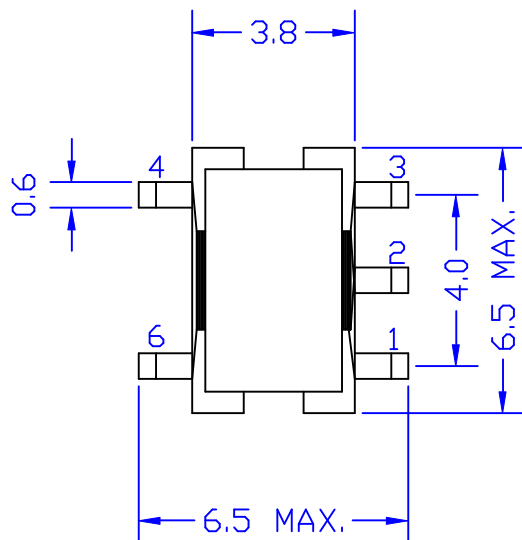

ELECTRICAL CHARACTERISTICS :

1. IMPEDANCE RATIO : PIN 1-3 : PIN 4-6 = 1CT : 1
2. 3dB BAND WIDTH : 2M-300MHZ
3. 1.2dB BAND WIDTH : 2M-65MHZ
4. INSERTION LOSS : 5MHZ = 1.5dB MAX.
10MHZ = 1.5dB MAX.
65MHZ = 1.5dB MAX.
100MHZ = 2.0dB MAX.
4. RETURN LOSS : (<2~5MHZ) = 6.5dB MIN.
(<5~65MHZ) = 9dB MIN.
(<65~100MHZ) = 5.5dB MIN.
5. HI-POT (<500VDC, 1mA, 2SEC) : PIN 1-6

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-8667 FAX:(02)2794-8004		TITLE RF TRANSFORMER	
A	RETURN LOSS	03/21/2003	PAIR	AL	SUEDY			DWG. NO. ATPL-146	
	RELEASE	08/08/2001	DOLLY	JEFF	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW
REVISIONS						08/28/01			<i>Pair</i>