


(PIN#2 : INTERCONNECTION)

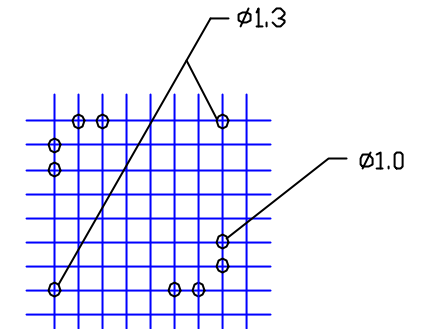

ELECTRICAL CHARACTERISTICS: (2754H2, 2754J2, 2754K2 COMPATIBLE)

- D.C.R. : 1-11 = 11.5 OHM +/-10% 5-7(6-8 SHORT) = 27.5 OHM +/-10%
- INDUCTANCE (@ 1KHZ, 0.1Vrms, W/H40mADC)
5-7 (6-8 SHORT) = 81.5mH +/-5.5%
- LEAKAGE INDUCTANCE (@10KHZ, 0.1Vrms, 5-7, 6-8 SHORT)
1-11 = 220uH MAX.
- TURNS RATIO (@40KHZ, 0.1Vrms, 6-8 SHORT)
5-7 : 11-1 = 1.5 +/-1%
- LONGITUDINAL BALANCE (@40KHZ) = 75dB TYP.
- HI-POT (@1500VAC, 1mA, 2SEC) PRI.-SEC.

						Atech [®]		TITLE ISDN-U TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO. ATS-205	
						TEL.(02)2794-6667 FAX.(02)2794-8004			
RELEASE				PAIR	SUEDY	UNITS. M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW Pair
REVISIONS						06/28/96			