


GRID 2.54 X 2.54

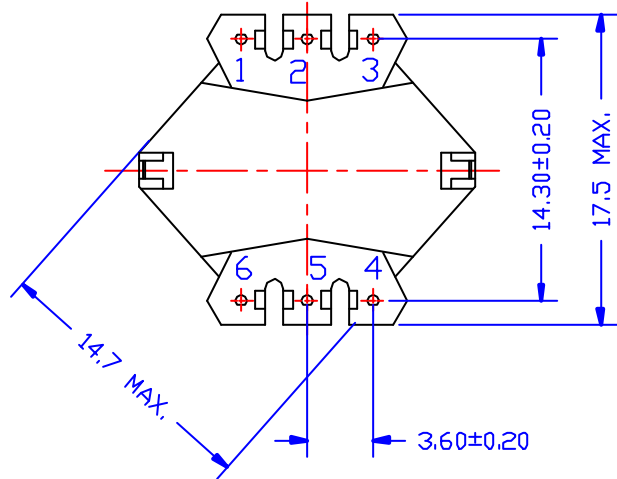

ELECTRICAL CHARACTERISTICS:(FOR MC 145572)

1. D.C.R. : PIN 1-6 (2-5 SHORT) = 15.2 OHM MAX.
PIN 3-4 = 11 OHM MAX.
2. INDUCTANCE (@10KHZ, 0.1Vrms, 2-5 SHORT)
PIN 1-6 = 28.2mH +/-6%
3. LEAKAGE INDUCTANCE (@10KHZ, 0.1Vrms, 2-5, 1-6 SHORT)
PIN 3-4 = 70uH MAX.
4. INTERWINDING CAP. (@10KHZ, 1Vrms, 2-5 SHORT)
PIN 1-4 = 90 PF MAX.
5. TURNS RATIO (@60KHZ, 1Vrms, 2-5 SHORT)
1-6 : 4-3 = 1.247 +/-1%
6. HI-POT (@1250VAC, 1mA, 2SEC.) 1-4 , 2-4

						Atech [®]		TITLE ISDN-U TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO. ATS-240	
						TEL:(02)2794-6667 FAX:(02)2794-8004			
RELEASE		PAIR	SLIEDY	UNITS M/M		SAFETY		SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW Pair	
REVISIONS						07/31/97			