
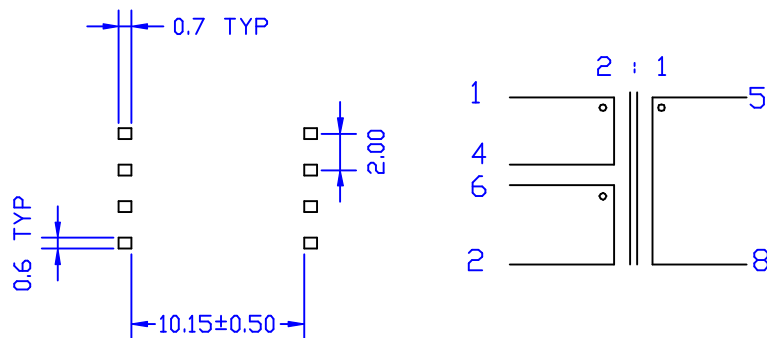


CARRIER TAPE

NOTES:
TRANSFORMERS ARE SUPPLIED
IN MULTIPLE REEL QUANTITIES
OF 500 PIECES ONLY

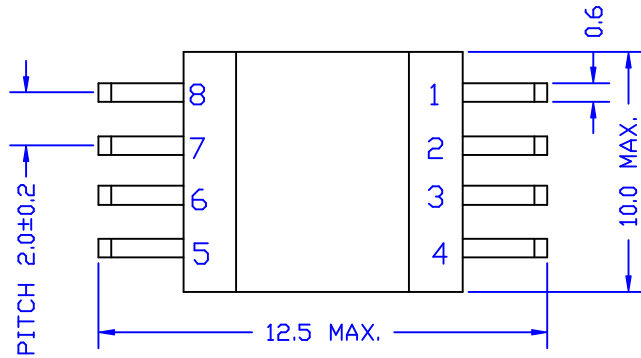

ELECTRICAL CHARACTERISTICS: (FOR AES/EBU DIGITAL AUDIO SIGNALS)

- D.C.R. : 1-4 = 240 mΩ MAX. 2-6 = 290mΩ MAX 5-8 = 320 mΩ MAX.
- INDUCTANCE : (@1KHZ, 0.1Vrms) 1-4 = 750uH MIN.
- LEACKAGE INDUCTANCE : (@10KHZ, 0.1Vrms, 5-8, 2-6 SHORT)
1-4 = 2uH MAX.
- INTERWINDING CAP : (@1KHZ, 0.1Vrms) 1-8 = 6pF MAX.
- URNS RATIO: (@50KHZ, 1Vrms)
6-2 : 1-4 = 1.03+/-2% 1-4 : 5-8 = 1.00+/-2%
- HI-POT : (@2KVDC, 1mA, 2SEC) 1-2, 1-5, 2-5

C	URNS RATIO	06/25/2003	RORY	AL	SUEDY	Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE	SPDIF TRANSFORMER
B	ADD QUANTITY	06/17/98	PAIR		SUEDY		DWG. NO.	ATS-245
A	ADD REEL PACKING	06/12/98	PAIR		SUEDY			
	RELEASE	05/14/98	PAIR		SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	M/M		DATE
REVISIONS						05/14/98		