


DOT PIN#1

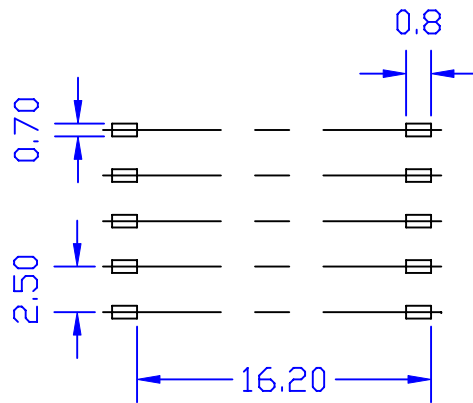

ELECTRICAL CHARACTERISTICS :

- D.R.C. : 1-2 = 308mOHM MAX. 3-4 = 199m OHM MAX.
7-9 = 65m OHM MAX. 8-10 = 65m OHM MAX.
- INDUCTANCE : (@250KHZ, 0.1Vrms) 3-4=127uH±10%
(@250KHZ, 0.1Vrms, 1A) 3-4 = 114.3uH MIN.
- LEAKAGE INDUCTANCE : (@250KHZ, 0.1Vrms, 1-2,7-9-8-10 SHORT) 3-4=1.2uH MAX.
- TURN RATIO : (@250KHZ, 0.1Vrms) 3-4 : 1-2 = 2±5%
3-4 : 7-9 = 2±5%
3-4 : 8-10 = 2±5%
- HI-POT : (@500VAC, 1mA, 2SEC) 3-7-8 , 3-1
- RoHS Compliant

						 Atech [®] Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE TRANSFORMER	
							DWG. NO. ATS-818R	
RELEASE	07/26/2006			SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	DRAW Pair	
REVISIONS						07/26/06		