

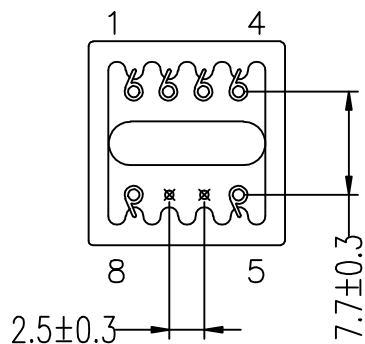
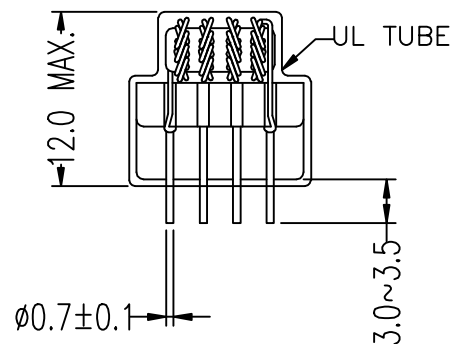


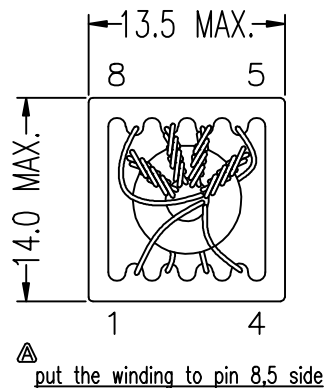

BASE PIN6,7 CUT OFF

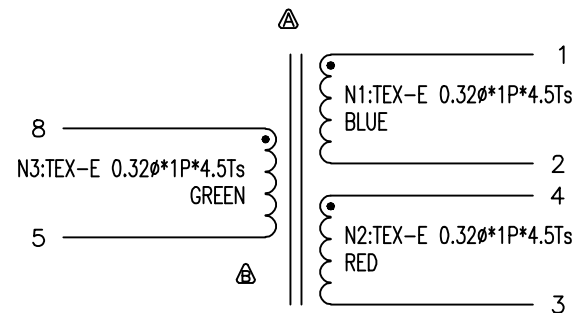

ELECTRICAL CHARACTERISTICS:

1. DCR : 1-2 = 25m Ω MAX.
4-3 = 25m Ω MAX.
8-5 = 25m Ω MAX.
2. INDUCTANCE(@1KHz, 0.25Vrms) :
1-2 = 5uH~25uH
4-3 = 5uH~25uH
8-5 = 5uH~25uH
3. LEAKAGE INDUCTANCE (@1MHz, 0.25V)
PIN 1-2 (PIN 4-3 , 8-5 SHORT) = 0.5uH MAX.
PIN 4-3 (PIN 1-2 , 8-5 SHORT) = 0.5uH MAX.
PIN 8-5 (PIN 1-2 , 4-3 SHORT) = 0.5uH MAX.
4. HI-POT(@3000VAC, 10mA, 1SEC) : 1-8 , 4-8
5. RoHS COMPLIANT

							TITLE POWER LINE TRANSFORMER	
B	CHANGE ELECTRICAL CHARACTERISTICS	02/10/2011	SHIRLEY	BETTY	KING		DWG. NO. PL-012R	
A	CHANGE SCHEMATIC	01/10/2011	SHIRLEY	BETTY	KING	UNITS: M/M		SHEET 1 of 1
	RELEASE	09/15/2010	SHIRLEY	BETTY	KING	SAFETY		
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW
REVISIONS						09/15/10		SHIRLEY