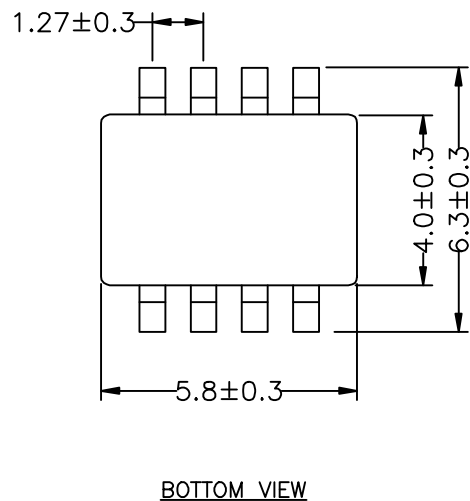
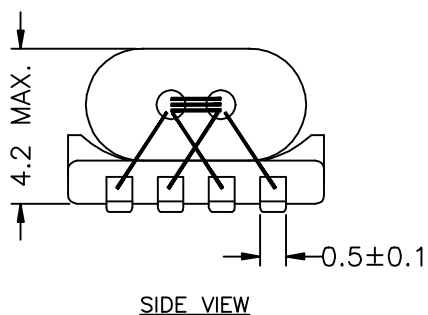
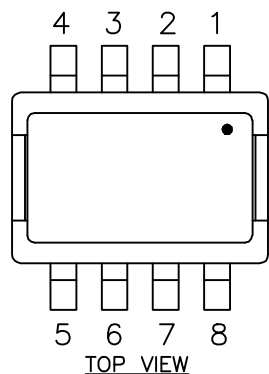


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-2 = 110mΩ MAX. , PIN 3-4 = 110mΩ MAX.
PIN 5-6 = 150mΩ MAX. , PIN 7-8 = 200mΩ MAX.
- INDUCTANCE (@10KHz, 100mVrms) :
PIN 1-4 (PIN 2-3 SHORT) = 48uH MIN.
- LEAKAGE INDUCTANCE (@200KHz, 0.1Vrms) :
PIN 1-4 (PIN 2-3 SHORT, PIN 5,6,7,8 SHORT) = 150nH MAX.
- INTERWINDING CAPACITANCE (@100KHz, 0.1Vrms) :
PIN 1-8 (PIN 2-3, PIN 6-7 SHORT) = 6pF MAX.
- TURN RATIO (@100KHz, 0.1Vrms) :
PIN 1-4 (PIN 2-3 SHORT) : 6-5 = 1.5 ±2%
PIN 1-4 (PIN 2-3 SHORT) : 8-7 = 1 ±2%
- HI-POT (@600VAC, 5mA, 1SEC) :
PIN 1 (PIN 2-3 SHORT) - PIN 8 (PIN 6-7 SHORT)
- RoHS COMPLIANT

								TITLE TRANSFORMER	
								DWG. NO. PL-041R	
	RELEASE	04/12/2013	SHIRLEY	RONAN	RONAN	UNITS: M/M	SAFETY		SHEET 1 of 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 04/12/2013	P/N:		DRAW SHIRLEY
REVISIONS									