
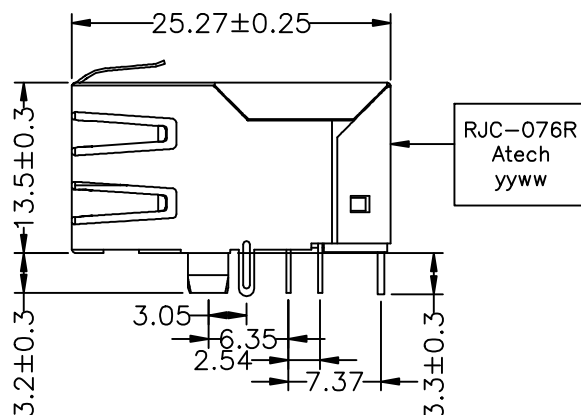


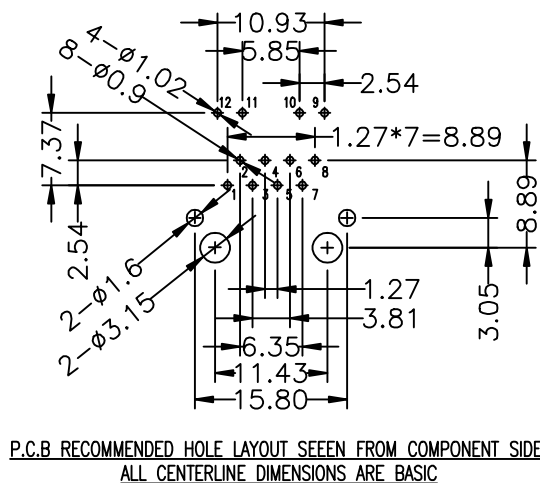

1. TURNS RATIO : TX/RX = 1CT : 1CT $\pm$ 3%.
2. OCL (@100KHz / 0.1Vrms, WITH 8mA DC BIAS) : 350uH MIN.
3. INSERTION LOSS (@0.1–100MHz) = -1.2 dB MAX.
4. RETURN LOSS : 1~30MHz = -18dB MIN.
30~60MHz = -14dB MIN.
60~80MHz = -12dB MIN.
5. CROSS TALK (dB MIN.) : 1–100MHz = -30dB
6. CMRR (dB MIN.) : 1–100MHz = -30dB
7. HI-POT : 1500 Vrms.
8. RoHS COMPLIANT

							TITLE RJ45 1*1 +LED 10/100 BASE- WITH MAGNETIC MODULE	
							DWG. NO. RJC-076R	
	RELEASE	05/02 /2013	SHIRLEY	BETTY	BETTY	UNITS: M/M	SAFETY	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	SHEET 1 OF 1
REVISIONS						05/03/13	DRAW SHIRLEY	