


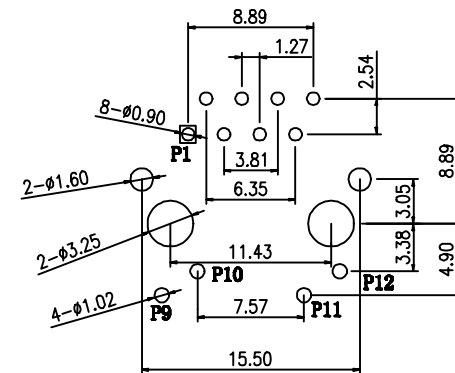


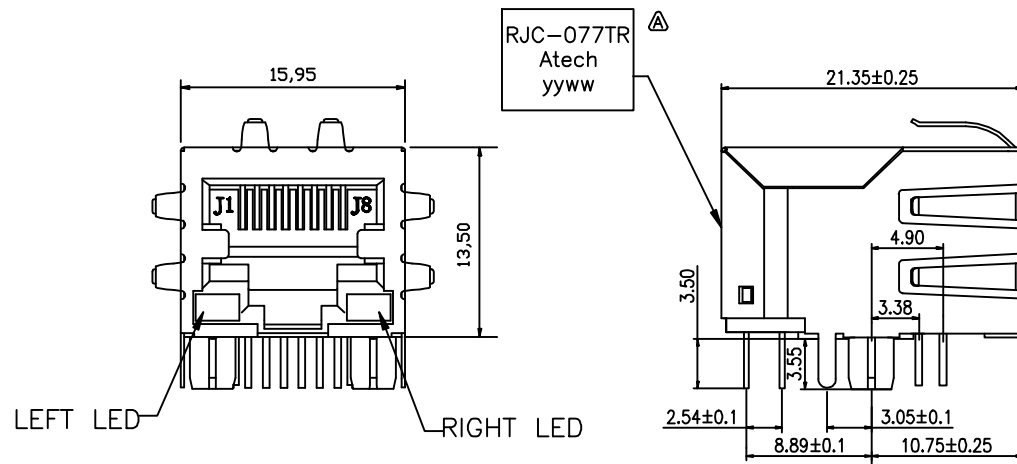

P.C.B RECOMMENDED HOLE LAYOUT SEEN FROM COMPONENT SIDE.
ALL CENTERLINE DIMENSIONS ARE BASIC

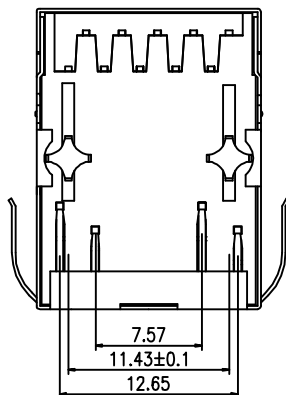

								TITLE RJ45 1*1 w/ Transformer	
								10/100 w/ LED	
A	ADD LOGO PRINT	12/18/2013	SHIRLEY	BETTY	BETTY	UNITS: M/M		DWG. NO. RJC-077TR	
	RELEASE	08/07/2013	SHIRLEY	BETTY	BETTY	SAFETY		SHEET 1 of 2	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 08/07/13		P/N: DRAW SHIRLEY	
REVISIONS									

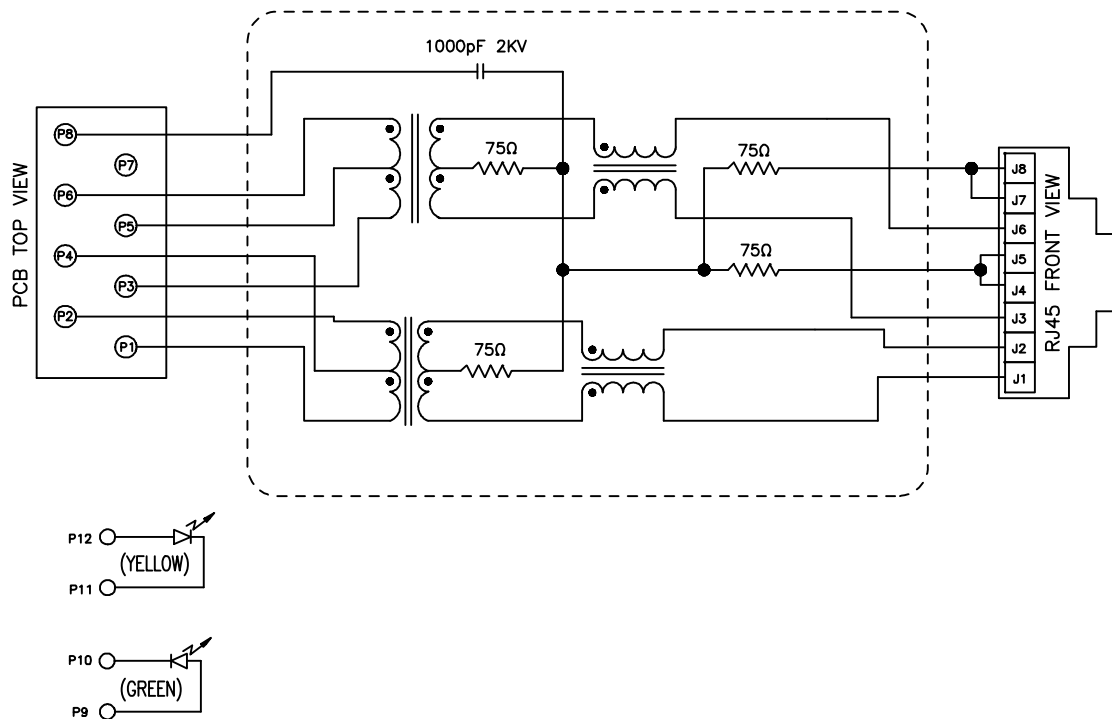

ELECTRICAL CHARACTERISTICS :

1. TURNS RATIO : TX/RX = 1CT : 1CT $\pm 3\%$.
2. HI-POT : 1500 Vrms.
3. OCL (@100KHz / 0.1Vrms, WITH 8MA DC BIAS) : 350uH MIN.
4. INSERTION LOSS (@0.1-100MHz) = -1.2 dB MAX.
5. RETURN LOSS : 1~30MHz = -18dB MIN.
30~60MHz = -14dB MIN.
60~80MHz = -12dB MIN.
6. CROSS TALK (@1-100MHz) = -30dB TYP.
7. CMRR (@0.1-100MHz) : -30dB TYP.
8. OPERATING TEMPERATURE RANGE : -40°C~+85°C
9. STORAGE TEMPERATURE RANGE : -40°C~+85°C
10. RoHS COMPLIANT

								TITLE RJ45 1*1 w/ Transformer	
								10/100 w/ LED	
A	ADD LOGO PRINT	12/18/2013	SHIRLEY	BETTY	BETTY	UNITS: M/M		DWG. NO. RJC-077TR	
	RELEASE	08/07/2013	SHIRLEY	BETTY	BETTY			SHEET 2 OF 2	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 08/07/13		P/N:	DRAW SHIRLEY
REVISIONS									